

Surtronic Duo

A portable measurement instrument
for checking surface roughness



Surtronic Duo

A portable tool for checking surface roughness.

What it does

Surtronic Duo measures Ra at the touch of a button and shows the result on a large LCD window. Cycle time is about 5 seconds and the result is saved until another measurement is taken.

Parameters Rz, Rp, Rv and Rt can be displayed and units of measure switched between inch and metric without re-measuring the part.

There is no setting up or programming of the device, it is ready to use out of the box. Operator training is not required. Battery life is 5,000 measurements minimum.

How it does it

A diamond stylus is drawn across the part. The motorized traverse mechanism is cam driven to ensure that the correct horizontal distance is traveled.

Vertical movement of the stylus as it travels across peaks and valleys is detected by a piezo-electric pick up which converts mechanical movement into an electrical signal.

The electrical signal is digitized and sent to a microprocessor where the parameters are instantly calculated using standardized algorithms.

Keeping it simple


Surtronic Duo keeps the process simple. It is the perfect tool for any inspector to check roughness anywhere.

- Auditing batch production before shipment
- Process control on the production line
- Quality control as an entry level instrument
- Checking large components or structures

Splits into two pieces

The bottom half contains the traverse mechanism and stylus pick up assembly. This is placed on the surface to be measured. It has a wide base to ensure stability.

The upper half includes the large LCD display, start button, mode and parameter buttons. This is held comfortably in the hand for easy operation and clear viewing of the results.

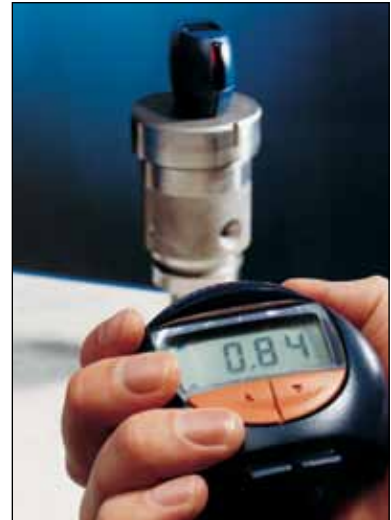

Surtronic Duo uses an infra-red (IrDA) link between the upper and lower units to provide remote, cable free operation up to a distance of one meter (40 inches).



Error proof calibration

Even calibration of the Surtronic Duo is easy and foolproof. First, the operator pushes a button to select calibration mode.

Then, using the roughness standard supplied with the instrument, the operator simply measures as usual.

Storage of the result and subsequent measurement compensation based on the calibration constant are completely automatic.

Energy efficient by design

Automatic shut-off after 5 minutes of inactivity and a low power consumption LCD help to preserve battery life.

The rapid mechanical traverse and 5 second cycle time conserve enough energy to provide a minimum of 5,000 measurements on a single set of batteries.

Standard off-the-shelf calculator type batteries are used and replacement is easy using a wide blade screwdriver or large coin.

Surface mount digital technology

Surtronic Duo uses modern electronic circuitry and components to optimize performance and extend useful operating life. Outstanding reliability and 5% of reading accuracy are just two of the features rarely found in instruments at this price level.

Pre set to industry standards

Surtronic Duo is configured to measure using the most common industrial settings:

- 5mm (0.2in) traverse length
- 0.8mm (0.03in) cut off
- 2CR filter
- 5µm (200µin) radius diamond stylus

Pre-setting these critical functions eliminates errors and ensures correlation between multiple operators.

5 parameters as standard:

Surtronic Duo - 5 parameters
Reference code 112/3115-01

Includes basic roughness parameters Ra and Rz plus advanced parameters Rp, Rv and Rt

Standard delivery scope:

- Surtronic Duo
- Calibration standard
- Batteries
- Carrying case
- Operation guide

Technical specifications

Gauge range	200µm (0.008in)
Accuracy	5% of reading + 0.1µm (4µin)
Pick up type	Piezoelectric
Gauge force	200mg
Stylus	Diamond, Radius 5µm (200µin)

Cut off value	0.8mm ± 15% (0.03in ± 15%)
Filter	2CR
Traverse length	5mm (0.2in)
Traverse speed	2mm/sec (0.08in/sec)
Display units	µm / µin
Battery life	5,000 operations minimum

Parameter results

Code 112/3115-01 Ra, Rz, Rv, Rp, Rt

Parameters	Range	Resolution
Ra:	40µm (1600µin)	0.01µm (0.4µin)
Rz, Rv, Rp, Rt:	199µm (7800µin)	0.1µm (4µin)

Dimensions

Overall dimensions	125x80x38mm (4.92x3.15x1.5 in)
Weight	200gm (7oz)

Component dimensions and condition

Min bore	65mm (2.6in)
Min diameter	25mm (1.0in)
Max temperature	35°C (95°F)

Nominal operating conditions

Temperature	20°C (68°F)
Humidity	0 to 80% non condensing

Storage conditions

Temperature	0 to 50°C (32°F to 122°F)
Humidity	0 to 80% non condensing

Taylor Hobson pursues a policy of continual improvements due to technical development in all their instruments. We therefore reserve the right to depart from catalogue specifications.

Serving a global market

Taylor Hobson is world renowned as a manufacturer of precision measuring instruments used for inspection in research and production facilities. Our equipment performs at nanometric levels of resolution and accuracy.

To complement our precision manufacturing capability we also offer a host of metrology support services to provide our customers with complete solutions to their measuring needs and total confidence in their results.

Contracted Services from Taylor Hobson

- **Inspection services**
measurement of your production parts by skilled technicians using industry leading instruments in accord with ISO standards
- **Metrology training**
practical, hands-on training courses for roundness and surface finish conducted by experienced metrologists
- **Operator training**
on-site instruction will lead to greater proficiency and higher productivity
- **UKAS Calibration and Testing**
certification for artifacts or instruments in our laboratory or at customer's site

For the above services, contact our Center of Excellence:
email: taylor-hobson.cofe@ametek.com
or call: **+44 116 276 3779**

- **Design engineering**
special purpose, dedicated metrology systems for demanding applications
- **Precision manufacturing**
contract machining services for high precision applications and industries
- **Preventative maintenance**
protect your metrology investment with a Tallycare service cover plan

For the above services, contact our Sales Department:
email: taylor-hobson.sales@ametek.com
or call: **+44 116 246 2034**



Taylor Hobson UK

(Global Headquarters)
PO Box 36, 2 New Star Road
Leicester, LE4 9JQ, England
Tel: +44 116 276 3771 Fax: +44 116 246 0579
email: taylor-hobson.uk@ametek.com



Taylor Hobson France

Rond Point de l'Épine Champs
Batiment D, 78990 Elancourt, France
Tel: +33 130 68 89 30 Fax: +33 130 68 89 39
taylor-hobson.france@ametek.com



Taylor Hobson Germany

Postfach 4827, Kreuzberger Ring 6
65205 Wiesbaden, Germany
Tel: +49 611 973040 Fax: +49 611 97304600
taylor-hobson.germany@ametek.com



Taylor Hobson India

1st Floor, Prestige Featherlite Tech Park
148, EPIP II Phase, Whitefield, Bangalore – 560 006
Tel: +91 1860 2662 468 Fax: +91 80 6782 3232
taylor-hobson.india@ametek.com



Taylor Hobson Italy

Via De Barzi
20087 Robecco sul Naviglio, Milan, Italy
Tel: +39 02 946 93401 Fax: +39 02 946 93450
taylor-hobson.italy@ametek.com



Taylor Hobson Japan

3F Shiba NBF Tower, 1-1-30, Shiba Daimon Minato-ku
Tokyo 105-0012, Japan
Tel: +81 (0) 3 6809-2406 Fax: +81 (0) 3 6809-2410
taylor-hobson.japan@ametek.com



Taylor Hobson Korea

#310, Gyeonggi R&DB Center, 906-5, Iui-dong
Yeongtong-gu, Suwon, Gyeonggi, 443-766, Korea
Tel: +82 31 888 5255 Fax: +82 31 888 5256
taylor-hobson.korea@ametek.com



Taylor Hobson China Beijing Office

Western Section, 2nd Floor, Jing Dong Fang Building (B10)
No.10, Jiu Xian Qiao Road, Chaoyang District, Beijing, 100015, China
Tel: +86 10 8526 2111 Fax: +86 10 8526 2141
taylor-hobson.beijing@ametek.com



Taylor Hobson China Shanghai Office

Part A, 1st Floor, No. 460 North Fute Road
Waigaoqiao Free Trade Zone, Shanghai, 200131, China
Tel: +86 21 5868 5111-110 Fax: +86 21 5866 0969-110
taylor-hobson.shanghai@ametek.com



Taylor Hobson Singapore

AMETEK Singapore, 10 Ang Mo Kio Street 65
No. 05-12 Techpoint, Singapore 569059
Tel: +65 6484 2388 Ext 120 Fax: +65 6484 2388 Ext 120
taylor-hobson.singapore@ametek.com



Taylor Hobson USA

1725 Western Drive
West Chicago, Illinois 60185, USA
Tel: +1 630 621 3099 Fax: +1 630 231 1739
taylor-hobson.usa@ametek.com



www.taylor-hobson.com